


Einbau- und Bedienungsanleitung Halogenunterwasserscheinwerfer. / Installation and operating instructions halogen - underwater spotlights.



Art.-Nr. 4240020
Einbaunische / Niche
(Art.-Nr. 4250050)

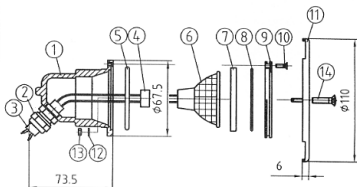

Art.-Nr. 4240020

Pos.	Stck.	Bezeichnung	Art.-Nr.
1	1	Gehäuse aus Rg	4240450101
2	1	Quetschverschraubung Pg9	7303650
1	1	Mutter f. Quetschverschraubung aus Rg	501951
1	1	Unterteil Quetschverschraubung	501950
1	1	UNI-Dichteinsatz	575364
3	1	Kabel 2 x 1,5mm ² 2 mtr.	576238
4	1	Fassung für Kabel	576206
5	1	O-Ring 50 x 3	514053
6	1	Halogenlampe 50W, 12V	536001
7	1	Scheinwerfersicherheitsglas	575342
8	1	O-Ring 53 x 1,5	514057
9	1	Flanschring aus Rg	4240200141
10	3	Senkschraube DIN 965 - M3 x 10 aus V4A	505249
11	1	Blende ø110 aus V4A	4243020171
12	2	Zahnscheibe DIN 6798 - 3,2	506601
13	2	Sechskantmutter DIN 934 - M3	506013
14	2	Linsensenkschraube DIN 966 - M5 x 20	505287
15	2	Linsensenkschraube DIN 966 - M5 x 50 als Fliesenausgleich	505286

ACHTUNG :

Scheinwerferkabel so einsetzen, dass dieser jederzeit ausgewechselt werden kann. Je nach Wasserbeschaffenheit, das Silikonkabel alle 3 - 5 Jahre austauschen.

Der Transformator-Klemmdeckel darf nur bei spannungsfreiem Netz geöffnet werden. Der Transformator muss oberhalb des Wasserspiegels installiert werden.

Der Scheinwerfer darf nur unter Wasser betrieben werden.

Art.-no. 4240020

Pos.	Unit.	Description	Art.-no.
1	1	housing made of gun metal	4240450101
2	1	threaded connection Pg9	7303650
1	1	screw nut for threaded connection	501951
1	1	lower part for threaded connection	501950
1	1	seal insert	575364
3	1	cable 2 x 1,5mm ² 2 metres	576238
4	1	lanpholder	576206
5	1	O-ring 50 x 3	514053
6	1	halogenlamp 50W, 12V	536001
7	1	safety glass	575342
8	1	O-ring 53 x 1,5	514057
9	1	flange made of gun metal	4240200141
10	3	countersunk screw DIN 965 - M3 x 10	505249
11	1	cover ø110 made of V4A	4243020171
12	2	toothed washer DIN 6798 - 3,2	506601
13	2	hexagon nut DIN 934 - M3	506013
14	2	lens head screw DIN 966 - M5 x 20	505287
15	2	lens head screw DIN 966 - M5 x 50 for tile installation	505286

ATTENTION :

Insert cable for underwater spotlights in such a way, that it can be replaced at any time. Depending upon water conditions the cable is to exchange all 3 - 5 years.

The cover of the transformer may only be removed if the connection to the power system is free of voltage. The transformer must be installed above the water level.

The underwater spotlight may only be switched on under water.